

≡ INTERMAX - DC FRONT

DOUBLE-ARMS INTER-ROW MACHINE WITH FRONTAL ATTACHMENT TO THE TRACTOR, WITHOUT CULTIVATOR



PRODUCT DESCRIPTION

INTERMAX-DC FRONT series includes right and left sided arms, used for the cultivation of vineyards and orchards inter-rows. An hydraulic system allows a simplified adaptation to the row width. INTERMAX -DC FRONT has the possibility to mount up to 12 interchangeable accessories, enabling to run all working necessities. This equipment is designed for not cultivating central row but exclusively for inter-row working. The FRONT (frontal) version of these machines is compatible with tractors equipped with a front lift or reversible tractors, offering greater flexibility of use.

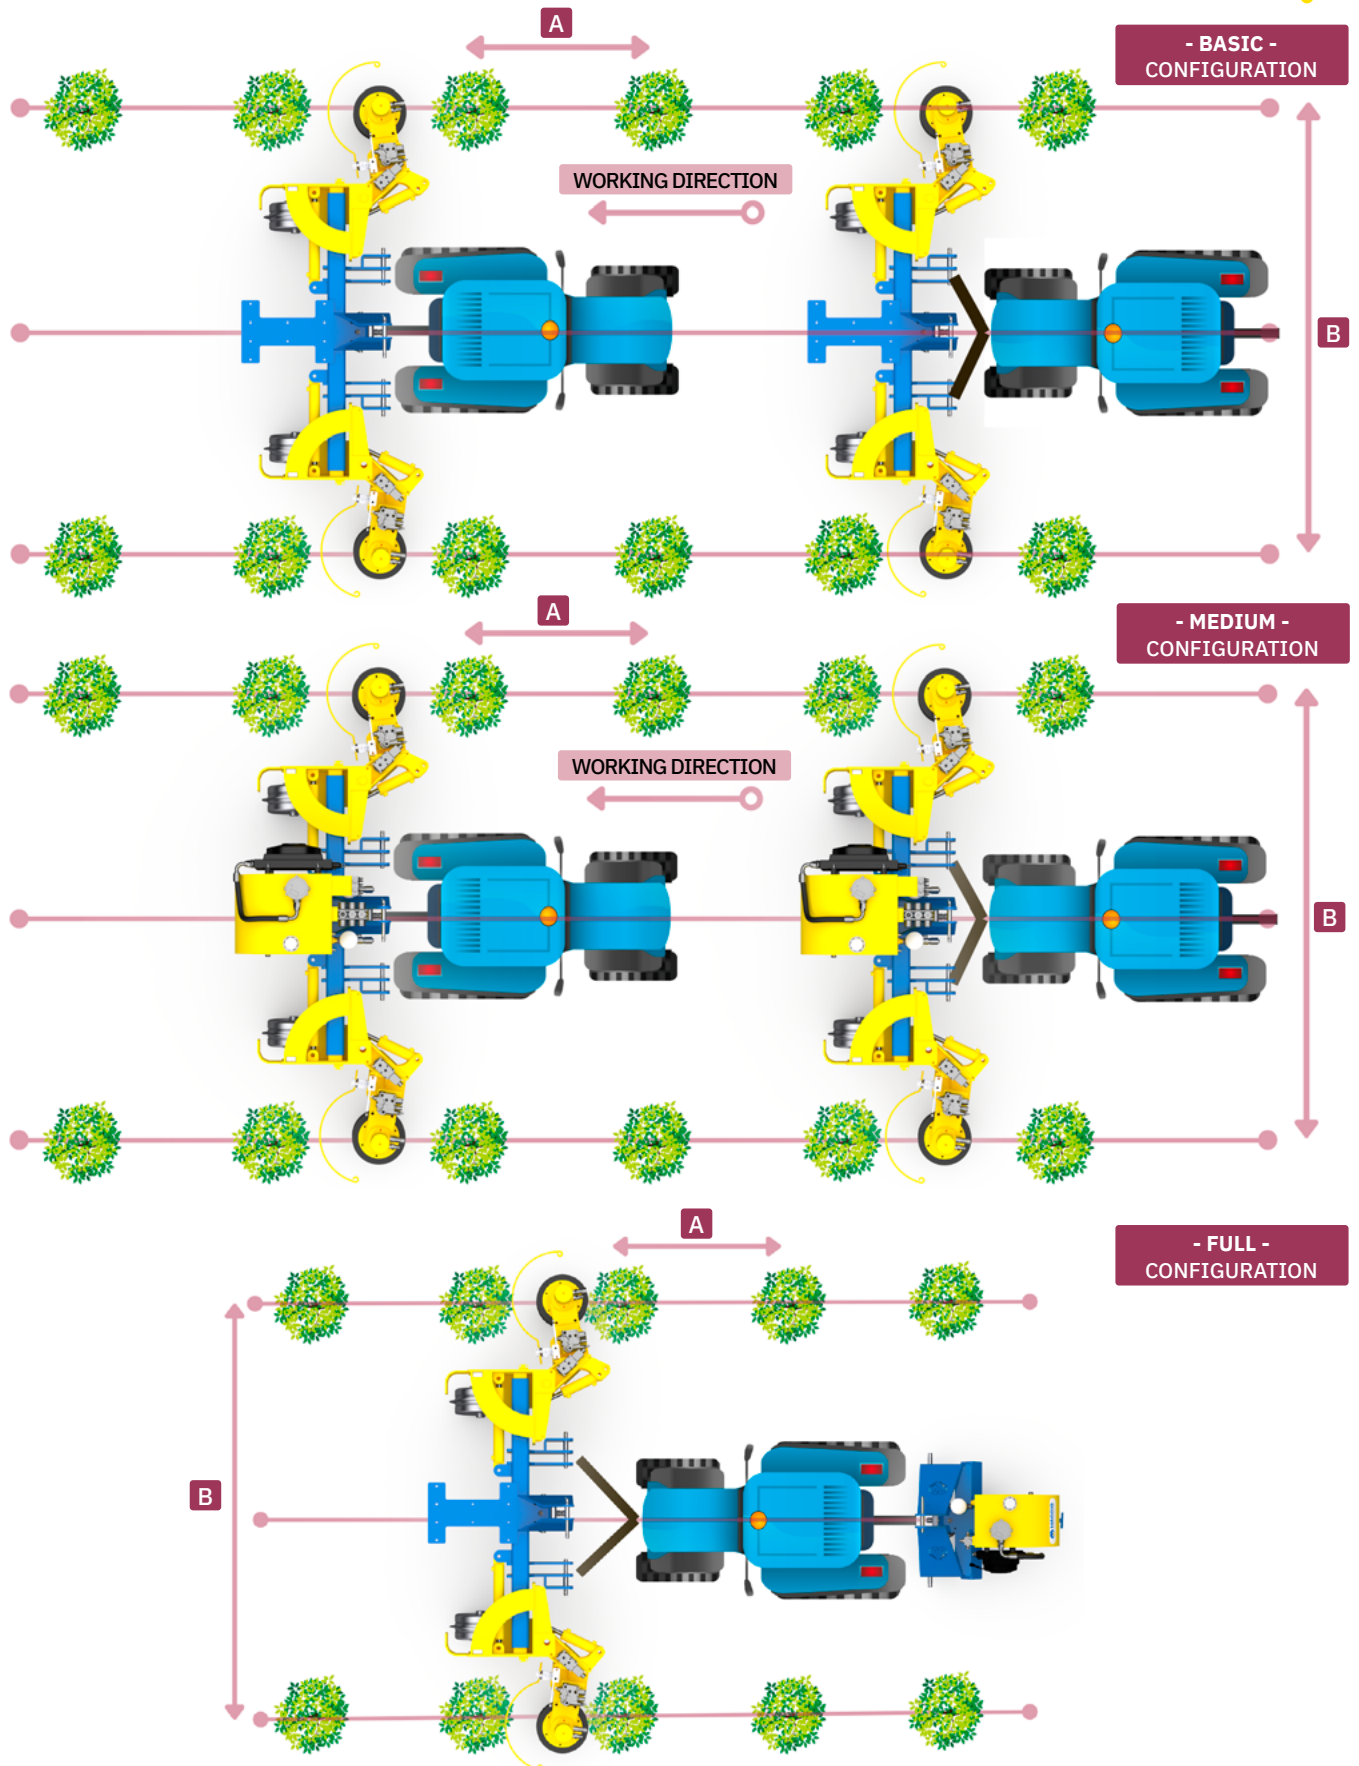
STANDARD EQUIPMENT

- Universal 3-point hitch Cat.2
- Electro-hydraulic emergency device with temporary or permanent arm recall button in case of manoeuvring
- Hydraulic regulation system of working width
- Three positions Recordable sensor (inclination, length, distance)
- **Independent Hydraulic System with oil cooling (MEDIUM - FULL Configuration)**
- Gearbox unit with PTO (1000-540 rpm)
- **Accessory arm speed control valve**
- Mechanically Adjustable Depth lateral wheels (*Optional Hydraulic Adjustment R/L*)
- Drive shaft T40/600
- **BASIC "B" CONFIGURATION:** Without an independent hydraulic system, with pipes to be connected to the tractor's hydraulic system with reversible or front lift
- **MEDIUM "M" CONFIGURATION:** With an independent hydraulic system mounted on the machine (ideal for tractors with front and reversible PTO lift)
- **FULL "F" CONFIGURATION:** With an independent hydraulic system and hydraulic tank/pump unit to be mounted at the rear on the 3-point hitches of the tractor (only for tractors with rear PTO with and without front lift) (Optional front lift kit supplied with the machine to be flanged to the tractor)

CONFIGURATIONS

MODEL					CODE
BASIC CONFIGURATION					
INTERMAX DC 2000 FRONT - B	200 - 250 cm	60 cm	580 Kg	50/60 hp	INT0106A-D
INTERMAX DC 2500 FRONT - B	250 - 350 cm	60 cm	610 Kg	60/70 hp	INT0121A-D
INTERMAX DC 3000 FRONT - B	300 - 450 cm	60 cm	650 Kg	70/80 hp	INT0296A-D
MEDIUM CONFIGURATION					
INTERMAX DC 2000 FRONT - M	200 - 250 cm	60 cm	660 Kg	50/60 hp	INT0382A-D
INTERMAX DC 2500 FRONT - M	250 - 350 cm	60 cm	690 Kg	60/70 hp	INT0384A-D
INTERMAX DC 3000 FRONT - M	300 - 450 cm	60 cm	730 Kg	70/80 hp	INT0386A-D
FULL CONFIGURATION					
INTERMAX DC 2000 FRONT - F	200 - 250 cm	60 cm	750 Kg	50/60 hp	INT0383A-D
INTERMAX DC 2500 FRONT - F	250 - 350 cm	60 cm	780 Kg	60/70 hp	INT0385A-D
INTERMAX DC 3000 FRONT - F	300 - 450 cm	60 cm	820 Kg	70/80 hp	INT0387A-D

Please note: The image is for illustrative purposes only and may not fully represent the product's standard features.



MODEL	A (min)	B (min - max)
DC 2000	60 cm	200-250 cm
DC 2500	60 cm	250-350 cm
DC 3000	60 cm	300-450 cm

INTERMAX - DC FRONT



ACCESSORIES - SOIL CULTIVATION

	1	CODE		2	CODE
		R - INT0185A			R - INT0283A
		L - INT0198A			L - INT0295A
		Interrow plowshare with weeding palette - R/L			
		50 cm Blade combination kit with harrow and Ø30 cm Brush - R/L			

	3	Ø 30 cm	Ø 60 cm	Ø 70 cm
		CODE	CODE	CODE
		R - INT0098A	R - INT0043A	R - INT0055A
		L - INT0137A	L - INT0149A	L - INT0285A
Harrow and brush unit - (Ø30/60/70cm) - R/L				

	4	50 cm	60 cm	80 cm
		CODE	CODE	CODE
		R - INT0134A	R - INT0119A	R - INT0276A
		L - INT0135A	L - INT0118A	L - INT0288A
Inter-row blade made of HARDOX with raking steel tools, sensor and lug - (50/60/80 cm) - R/L				

	5	2 DISKS	3 DISKS	4 DISKS	5 DISKS
		CODE	CODE	CODE	CODE
		R-INT0281A	R-INT0188A	R-INT0202A	R-INT0244A
		L-INT0289A	L-INT0204A	L-INT0208A	L-INT0247A
Hydraulic rotary weeder Ø30,5 with plant cleaning scrapers (2/3/4/5 Disks) - R / L					

	6	DX	SX
		CODE	CODE
		COL0015A	INT0291A
	Rotating harrow head group (60cm) - R / L		

	7	Ø 45 cm	Ø 60 cm	Ø 80 cm
		CODE	CODE	CODE
		R - INT0326A	R - INT0321A	R - INT0723A
		L - INT0330A	L - INT0331A	L - INT0365A
Vertical round rotary tiller head (Ø45/60/80 cm) - R/L				

	8	1 DISK	2 DISKS
		CODE	CODE
		R - INT0364A	R - INT0342A
		L - INT0370A	L - INT0371A
Hydraulic motorized disk ridger head Ø30,5 cm - (1/2 Disks) - R/L			

ACCESSORIES - MECHANICAL WEEDING

	9	50 cm	60 cm
		CODE	CODE
		R - INT0176A	R - INT0174A
		L - INT0177A	L - INT0175A
		Horizontal inter-row arm with special 6 mm (50/60 cm) wires - R / L . Suitable for mechanical weeding in organic farming	


	10	60 cm	80 cm
		CODE	CODE
		R - INT0277A	R - INT0297A
		L - INT0286A	L - INT0298A
Mini-cutter head 60/80 cm suitable for mechanical weeding in organic farming - R/L			

	11	Ø 45 cm	Ø 60 cm	Ø 80 cm
		CODE	CODE	CODE
		R - INT0366A	R - INT0267A	R - INT0368A
		L - INT0367A	L - INT0290A	L - INT0369A
Mower head for mechanical weeding in organic farming - (Ø 45/60/80 cm) - R/L				


	12	CODE		13	CODE
		R - INT0079A			R - INT0089A
		L - INT0293A			L - INT0095A
	Brush cutter head Ø60 cm with special Ø4mm wires suitable for mechanical weeding in organic farming - R/L		Head self-levelling system (only for accessories n.9/11/12) - R/L		

ACCESSORIES ON REQUEST

	14	CODE		15	CODE
		INT0299A			INT0195A
		Kit of telescopic track eradicator disc Ø33 cm - R/L			Right and Left Telescopic safety shank complete with tool hoe, for blade protection in case of collision with fixed obstacles

	16	CODE		17	CODE
		INT0300A			COM0202
		Right and left lateral containment bulkheads kit			Kit Agriculture 4.0/5.0 for inter-rows equipments (1 year X FARM licence, 5 years 4G connectivity, wiring) - Supervises: rounds/min PTO, oil temperature, speed, position, working hours

	18	CODE	
		INT0390A	
		Kit of hydraulic lift for using the equipment with tractors without an integrated front lift FOR BRACKET CUSTOMIZATION, PLEASE CONTACT OUR OFFICES POST-ORDER	

	19	RIGHT WHEEL	LEFT WHEEL
		CODE	CODE
		STD0210A	STD0211A
		Hydraulic kit of depth regulation of the wheels - R/L	

	20	2 HYDRAULIC MOVEMENTS	3 HYDRAULIC MOVEMENTS	4 HYDRAULIC MOVEMENTS
		CODE	CODE	CODE
		COM0184	COM0185	COM0186
		Electro-hydraulic distributor for controlling machine movements (2/3/4 movements) The tractor required double acting hydraulic remote outlets		

	21	CODE
		INT0178A
		Self-leveling hydraulic inclination of tools (± 20°) - R/L