



PRODUCT DESCRIPTION

LAMAX-SF series includes right sided single arm, used for the cultivation of vineyards and orchards inter-rows. An hydraulic system allows a simplified adaptation to the row width. LAMAX-SF has the possibility to mount up to 2 interchangeable accessories (the inter-row blade and the plowshare). This equipment is designed for cultivating the central row using a pantograph-type cultivator with rigid shanks

STANDARD EQUIPMENT


- Universal 3-point hitch Cat.2
- **Right inter-row head with tool holder**
- Electro-hydraulic emergency device with temporary or permanent arm recall button in case of manoeuvring
- Three positions Recordable sensor (inclination, length, distance)
- **Independent hydraulic system with oil cooling**
- Gear box to be linked to the PTO (540 rounds/min)
- **Hydraulic variable regulation of pantograph-type working width**
- Lateral depth wheels
- Variable cultivator with **rigid shanks** and hoes for summer and winter plowing
- Left side rounded protection
- Safety protections

PLEASE NOTE: THE MACHINE MUST BE CONFIGURED BY INSERTING THE WORKING TOOL AND THE SAFETY TOOL

CONFIGURATIONS

MODEL	 MIN MAX	 MIN MAX					CODE
LAMAX - SF2150	190 - 260 cm	120 - 155 cm	60 cm	6	600 Kg	60/70 hp	COL0429A-D
LAMAX - SF2200	200 - 280 cm	125 - 165 cm	60 cm	6	610 Kg	60/70 hp	COL0413A-D
LAMAX - SF2300	230 - 350 cm	135 - 195 cm	60 cm	8	750 Kg	70/80 hp	COL0430A-D


USAGE GUIDE

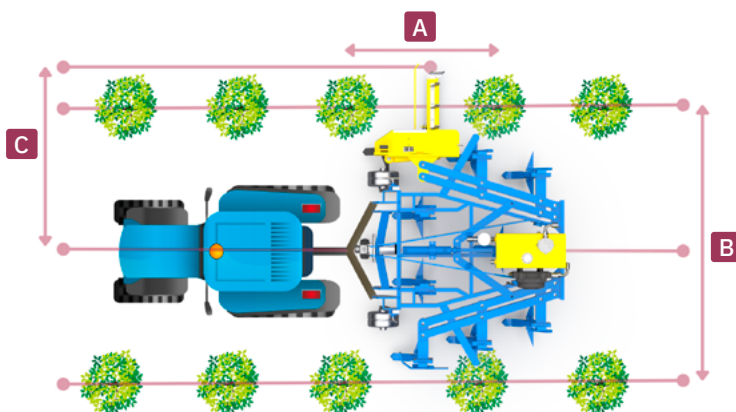

MODEL	A (min)	B (min - max)	C (min - max)
SF 2150	60 cm	190-260 cm	120-155 cm
SF 2200	60 cm	200-280 cm	125-165 cm
SF 2300	60 cm	230-350 cm	135-195 cm

Please note: The image is for illustrative purposes only and may not fully represent the product's standard features.

ACCESSORIES ON REQUEST

	1	CODE		
		COL0424A		
Right Hydraulic inclination (± 20°)				
	2	CODE		
		COL0425A		
Right Manual inclination (± 20°)				
	3	CODE		
		COL0261A		
Right Interrow plowshare with weeding palette				
	4	CODE		
		COL0346A		
Right Kit of adjustable track eradicator disc Ø33 cm				
	5	CODE		
		COL0508A		
Safety shank. Protects the blade in case of collision with obstacles - Supplied with tool hoe - R				
	6	CODE		
		COM0202		
Kit Agriculture 4.0/5.0 for inter-rows equipments (1 year X FARM licence, 5 years 4G connectivity, wiring) - Supervises: rounds/min PTO, oil temperature, speed, position, working hours				
	7	50 cm	60 cm	80 cm
		CODE	CODE	CODE
		COL0245A	COL0246A	COL0464A
Right Inter-row blade made of HARDOX with raking steel tools, sensor and lug - (50/60/80 cm)				
	8	130 cm	140 cm	150 cm
		CODE	CODE	CODE
		COL0113A	COL0004A	COL0101A
Self-leveling helical roller Ø 35 cm N.B. Sizes other than those listed can be manufactured upon request.				
	9	130 cm	140 cm	150 cm
		CODE	CODE	CODE
		COL0700A	COL0697A	COL0698A
Self-leveling PACKER roller Ø 35 cm N.B. Sizes other than those listed can be manufactured upon request.				
	10	2 HYDRAULIC MOVEMENTS	3 HYDRAULIC MOVEMENTS	4 HYDRAULIC MOVEMENTS
		CODE	CODE	CODE
		COM0184	COM0185	COM0186
Electro-hydraulic distributor for controlling machine movements (2/3/4 movements) - The tractor requires double acting hydraulic remote outlets				